




# GROUND LIGHTS SPECIFICATION SHEET



**COLLINGWOOD**  
LIGHTING

01604 495 151  
collingwoodlighting.com

-  @collingwoodLED
-  /collingwoodlighting
-  collingwoodled

## GL019 S TK

1W mini LED ground light threaded kit

### FEATURES

<b>Wattage</b>	1W (350mA) 2W (700mA)
<b>IP rating</b>	IP68
<b>IK rating</b>	IK07
<b>Colour flexibility</b>	Fixed colour
<b>Walk Over / Drive Over</b>	Walk over (5mm toughened glass)
<b>Input</b>	350mA / 700mA
<b>LED Lifetime</b>	70,000h L70 B10
<b>SDCM</b>	3SDCM

### INSTALLATION INFORMATION

<b>Cut Out Size</b>	Ø 37mm
<b>Bathroom zone</b>	0
<b>Construction Material</b>	Stainless steel (316)
<b>Weight</b>	304g
<b>Maximum ambient temperature</b>	50°C

### GUARANTEE / WARRANTY

7 year extended warranty

### FEATURES & BENEFITS

New - can now also be used with a 700mA driver for increased light output (see page 282 for driver matrix)

Theft/vandal-proof. Threaded body fits securely into supplied aluminium tube using tightening key

Aluminium tube for secure installation in concrete or soft ground environments

Low profile waterproof ground light. Ideal for decking or by swimming pools

### PHOTOMETRICS @ 25°C

Partcode	Colour	Beam angle	350mA			700mA		
			lm	lm/W	lx @ 1m	lm	lm/W	lx @ 1m
GL019 S TK NW	4000K	12°	90	90	1833	130	65	2648
GL019 S TK 27	2700K	12°	70	70	1425	115	58	2341
GL019 S TK BLUE	Blue	12°	10	10	204	20	10	407

### WIRING INFORMATION

<b>Cable / Flying Lead</b>	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
<b>Type of Wiring Required</b>	Series


### LED DRIVERS

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
PLU/350 1-9	220-240V	Yes	No	1	1	9
PLD UNI-DRIVE 350MA	N/A	Yes	Yes (1-10V)	2	1	10
PLU/700 3-9	N/A	Yes	No	1	3	9


### ACCESSORIES


<b>JB2 / JB4 / JB6</b>	IP68 waterproof connectors
<b>PDC/GRID DIMMER</b>	Grid dimmer kit for multiple fitting types

Beam angle: 12°

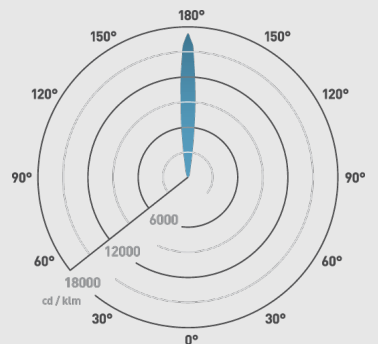

Ø40/37mm



 This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

A+

A

A

C

D

E

LED

874/2012