

SPIKE LIGHTS SPECIFICATION SHEET



COLLINGWOOD
LIGHTING

01604 495 151
collingwoodlighting.com

- @collingwoodLED
- /collingwoodlighting
- collingwoodled

SL220

Low voltage LED spike light

FEATURES

Wattage	2.2W (350mA) 4.6W (700mA)
IP rating	IP65
Colour flexibility	Fixed colour
Tilttable	90°
Input	Driver required (350mA / 700mA)
LED Lifetime	70,000h L70 B10
SDCM	3SDCM

INSTALLATION INFORMATION

Construction Material	Anodised aluminium Stainless Steel 316 Copper
Weight	512g
Maximum ambient temperature	50°C
SELV	Driver Dependant

GUARANTEE / WARRANTY

7 year extended warranty


FEATURES & BENEFITS

- High efficacy - up to 144lm/W
- Improved look and feel with single LED
- New stainless steel and anodised bronze finishes
- Higher light output than predecessor
- Low voltage can now run on 700mA drivers
- Reduced body length by 12% for a neat and compact appearance

PHOTOMETRICS @ 25°C

Partcode	Finish	Colour	Beam angle	350mA			700mA		
				lm	lm/W	lx @ 1m	lm	lm/W	lx @ 1m
SL220BWBX40	Black Anodised Aluminium	4000K	40°	310	141	705	530	115	1205
SL220DWBX40	Stainless Steel 316	4000K	40°	310	141	705	530	115	1205
SL220ZWBX40	Bronze Anodised Aluminium	4000K	40°	310	141	705	530	115	1205
SL220BWBX30	Black Anodised Aluminium	3000K	40°	300	136	682	520	113	1182
SL220DWBX30	Stainless Steel 316	3000K	40°	300	136	682	520	113	1182
SL220ZWBX30	Bronze Anodised Aluminium	3000K	40°	300	136	682	520	113	1182
SL220BWBX27	Black Anodised Aluminium	2700K	40°	290	132	659	515	112	1171
SL220DWBX27	Stainless Steel 316	2700K	40°	290	132	659	515	112	1171
SL220ZWBX27	Bronze Anodised Aluminium	2700K	40°	290	132	659	515	112	1171
SL220CWBX27	Solid Copper	2700K	40°	290	132	659	515	112	1171

Beam angle: 40°

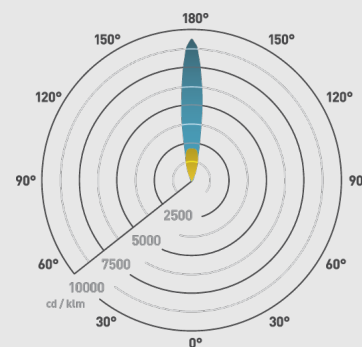



WIRING INFORMATION

Cable / Flying Lead	3m H05RN-F rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

LED DRIVERS

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
PLU/350 1-9	220V-240V	Yes	No	1	1	4
PLR/350 1-5	220V-240V	Yes	No	1	1	3
PLD UNI-DRIVE 700MA	220V-240V	Yes	Yes (1-10V)	2	1	5

Ø62.5mm

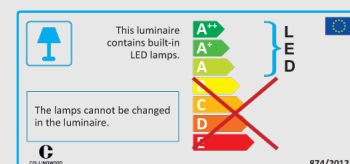

874/2012

SPIKE LIGHTS SPECIFICATION SHEET


ACCESSORIES


JB2 / JB4 / JB6	Waterproof junction box / Gel filled waterproof connectors	Sold Separately
PDC/GRID DIMMER	1-10V dimmer module	Sold Separately
GH220	Simple hood to reduce glare whilst maintaining a good light distribution	Sold Separately
GS220	Stylish, baffle-style snoot, perfect for creating a moonlighting effect	Sold Separately




COLLINGWOOD
LIGHTING

01604 495 151
collingwoodlighting.com

 @collingwoodLED

 /collingwoodlighting

 collingwoodled

SL220

The SL220 emits light anywhere that the ground is soft enough to take its anodised aluminium spike. This spike light comes with a robust outdoor cable, a choice of LED colours and a 7-year extended warranty. The head tilts through 90° from vertical to horizontal for ultimate versatility.