




# WALL LIGHTS SPECIFICATION SHEET



**COLLINGWOOD**  
LIGHTING

01604 495 151  
collingwoodlighting.com

-  @collingwoodLED
-  /collingwoodlighting
-  collingwoodled

## WL060

Straight to mains LED halo / flood wall light

### FEATURES

Wattage	2.6W
IP rating	IP65
Colour flexibility	Fixed colour
Tilttable	No
Input	Mains AC
LED Lifetime	70,000h L70 B10
SDCM	3SDCM

### INSTALLATION INFORMATION

Bathroom zone	2
Inrush Current	9A 0.8ms
Construction Material	Anodised aluminium
Weight	0.6kg
Maximum ambient temperature	40°C

### PHOTOMETRICS @ 25°C

Partcode	Finish	Colour	Beam angle	CRI	lm	lm/W	lx @ 1m
WL060 NW	Silver	4000K	110°	>80Ra	82	32	46
WL060 WW	Silver	3000K	110°	>80Ra	58	22	26
WL060 27	Silver	2700K	110°	>80Ra	56	22	25

### WIRING INFORMATION

Cable / Flying Lead	0.3m
Type of Wiring Required	Parallel

### LED DRIVERS

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
N/A (integrated SELV driver)	220-240V	Yes	No	N/A	N/A	N/A

### ACCESSORIES

N/A	No accessories required
-----	-------------------------

### GUARANTEE / WARRANTY

7 year extended warranty




### FEATURES & BENEFITS

Bi-directional wall light offering decorative halo effect and functional downward flood light

Straight to mains

Complete with wall fixings and waterproof crimp connectors

### Beam angle: 110°

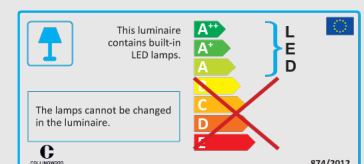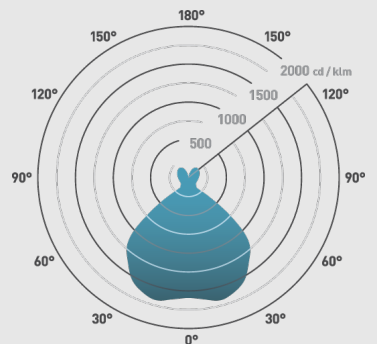

874/2012