

WALL LIGHTS SPECIFICATION SHEET



COLLINGWOOD
LIGHTING

01604 495 151
collingwoodlighting.com

- @collingwoodLED
- /collingwoodlighting
- collingwoodled

WL220 MAINS

Straight to mains LED wall light

FEATURES

Wattage	5.7W
IP rating	IP65
Colour flexibility	Fixed colour
Tilttable	90°
Rotation angle	330°
Dimmable	No
Input	Mains AC
LED Lifetime	70,000h L70 B10
SDCM	3SDCM

INSTALLATION INFORMATION

Bathroom zone	2
Inrush Current	60A 0.037ms
Construction Material	Anodised aluminium Stainless Steel 316 Copper
Weight	0.5kg
Maximum ambient temperature	50°C

GUARANTEE / WARRANTY

7 year extended warranty

FEATURES & BENEFITS

- Straight to mains
- High efficacy - up to 93lm/W
- Improved look and feel with single LED
- New stainless steel and anodised bronze finishes
- Higher light output than predecessor

PHOTOMETRICS @ 25°C

Partcode	Finish	Colour	Beam angle	CRI	lm	lm/W	lx @ 1m
WL220ZBWM40	Bronze	4000K	40°	>80Ra	530	93	1205
WL220WBWM40	Black	4000K	40°	>80Ra	530	93	1205
WL220DWBM40	Silver	4000K	40°	>80Ra	530	93	1205
WL220ZBWM30	Bronze	3000K	40°	>80Ra	520	91	1182
WL220WBWM30	Black	3000K	40°	>80Ra	520	91	1182
WL220DWBM30	Silver	3000K	40°	>80Ra	520	91	1182
WL220ZBWM27	Bronze	2700K	40°	>80Ra	515	90	1171
WL220WBWM27	Bronze	2700K	40°	>80Ra	515	90	1171
WL220DWBM27	Silver	2700K	40°	>80Ra	515	90	1171
WL220CWBM27	Copper	2700K	40°	>80Ra	515	90	1171

WIRING INFORMATION

Cable / Flying Lead	0.3m
Type of Wiring Required	Parallel


LED DRIVERS

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
N/A (integrated SELV driver)	220-240V	Yes	No	N/A	N/A	N/A



ACCESSORIES

GH220	No accessories required
GS220	

Beam angle: 40°

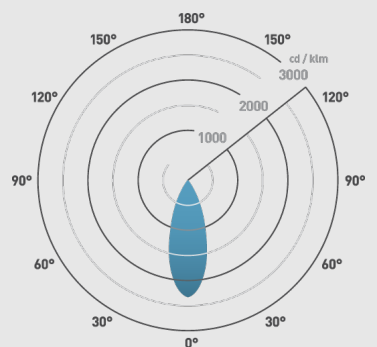

145mm

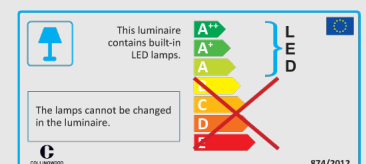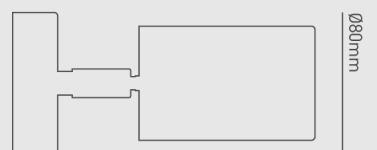

874/2012