




STEP LIGHTS SPECIFICATION SHEET



COLLINGWOOD
LIGHTING

01604 495 151
collingwoodlighting.com

-  @collingwoodLED
-  /collingwoodlighting
-  collingwoodled

WL341

Asymmetric, straight to mains, cast finish step light

FEATURES

Wattage	2.6W
IP rating	IP67
Colour flexibility	Fixed colour
Walk Over / Drive Over	Walk over
Input	Mains AC
LED Lifetime	70,000h L70 B10
SDCM	3SDCM

INSTALLATION INFORMATION

Cut Out Size	Ø 80mm
Bathroom zone	2
Inrush Current	9A 0.8ms
Construction Material	Stainless steel (316)
Weight	1000g
Maximum ambient temperature	35°C
SELV	Yes

PHOTOMETRICS @ 25°C

Partcode	Colour	Beam angle	CRI	lm	lm/W	lx @ 1m
WL341NW	4000K	50°	>70Ra	59	22	65
WL341WW	3000K	50°	>80Ra	50	19	54
WL34127	2700K	50°	>80Ra	49	19	52

WIRING INFORMATION

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 7mm)
Type of Wiring Required	Parallel

LED DRIVERS

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
N/A (integrated SELV driver)	N/A	N/A	No	2	N/A	N/A

ACCESSORIES

Installation tube included	
JB5	Gel filled waterproof connector
WC 5-9	Quick release waterproof joint


GUARANTEE / WARRANTY

7 year extended warranty


FEATURES & BENEFITS


- Can be used as a wall light or ground light
- Straight to mains for easy installation
- Installation tube included
- 1m H05RN-F rubber cable attached for permanent use outdoors

Beam angle: 50° C0/C180 50°
C90/C270

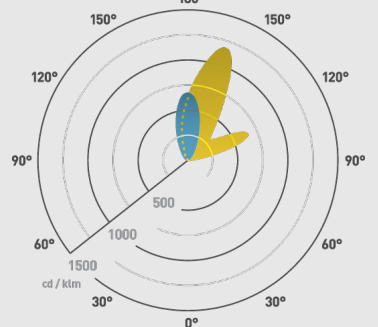

98x98mm



 This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

A+

A

A

C

D

E

LED

COLLINGWOOD 874/2012