

# Instruction Manual - Fruit Presser



Congratulations on your purchase from Lacewing! Now, let's set it up ready to press your favourite fruit!

## Parts List:



A (Stand and juice collecting bowl)



B (Press Handle)



C (Pressure Plate)



Dx2 (Hoop)



E (Pressing Cage)



Fx2 (Wooden Plate)



G (Wooden Plate)



Hx2 (Wooden Cross Bar)



I (Plastic Ring  
Screw)



Jx3 (Juice Bag)



K (Stainless Steel  
Screw)




L (Centre Rod)



M (Centre Rod)

#### Assembly:

1. Part D and Part E, before being assembled, all metal hoops with bevel edge should be set in one direction whilst the smooth edge must be in-line on the opposite side. Part E should be attached to the inner side of the metal hoops.

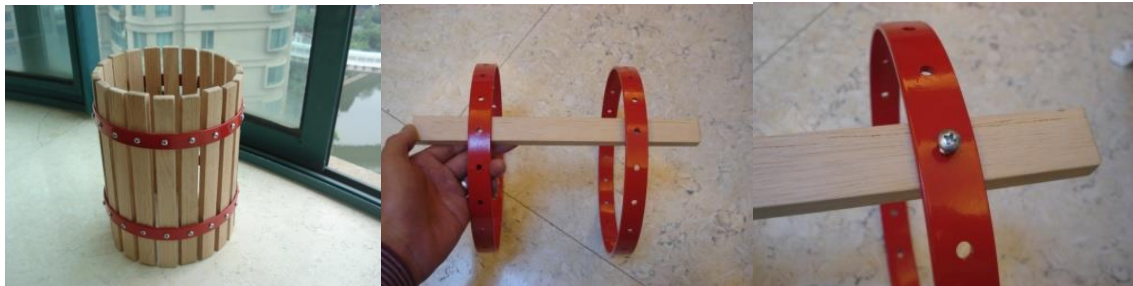

When assembly is finished, all pressing cage blocks should be placed upon a flat surface to make sure all blocks are kept in line and with the same height, to make sure it's smooth and steady when placed in the round base.

2. Part C and Part G assembly



- Part L and Part M should be assembled first, then to be screwed to A



- Put the assembled pressing cage with bevel edge upwards on the assembled pressing stand (Part A) and cover with a juice bag (Part J).



- Put the chopped fruit into the barrel, then place Part F & Part H in sequence, after that, place assembled Part C & Part G (Step 2) over the centre rod.



- The pressure ring (Part I) should be placed over the pressure plate first, then screw on the press handle (Part B). Fruit can be pressed when rotating Part B in clockwise direction.

